

# Operator's manual



**Salt and sand spreader  
City Ranger 2260/2250**

# Introduction

**Dear Customer,**

## **Congratulations with your new Egholm product**

The City Ranger 2260/2250 is a Danish designed and manufactured product, which offers a very flexible way of maintaining outdoor areas.

## **Optimal use of your City Ranger 2260/2250 salt and sand spreader**

To ensure optimal performance of your City Ranger 2260/2250 salt and sand spreader, please read this manual carefully before using the machine. Failure to do so can result in personal injury and damage to the machine.

## **Safety**

The salt and sand spreader is equipped with various devices to ensure optimal operational safety, both for the user and the surroundings. We ask you to pay particular attention to section 1.1 Safety. The machine must only be serviced by professionals.

The salt and sand spreader is designed only for use by professionals. On delivery, the user will receive thorough training to become a competent operator.

Do not lend the machine to anyone who has not been thoroughly trained and has not read this manual carefully.

The operator's manual should be considered as a permanent part of the machine and must remain with it if the machine is sold.

## **Warnings**

Some items in this operator's manual are marked with this warning symbol. The warning indicates areas where extra care has to be taken to avoid personal injury or damage to the machine and its accessories. The warning also shows what you should pay special attention to.



## **Reservations**

As it is the Egholm policy to make continuous improvements, we reserve the right to alter the machine's specifications and equipment at any time without notice. Egholm accepts no liability for errors or omissions in the operator's manual.

## **Contact us**

Should you have questions of any kind regarding your Egholm product, do not hesitate to contact Egholm.

Best regards

Egholm A/S · Transportvej 27 · DK-7620 Lemvig

T. +45 97 81 12 05 · F. +45 97 81 12 10

e-mail: [info@egholm.dk](mailto:info@egholm.dk) · [www.egholm.eu](http://www.egholm.eu)



## **Egholm app - easy access to useful material**

Download our Egholm app, enter the serial number of your machine and possibly add attachments, and get access to videos, manuals, technical specifications and much more.

If you agree to receive notifications, you will be notified about product and service information, offers etc. The app is available for Apple and Android mobile phones.

General information .....	5
1.1 Safety .....	5
1.2 EC Declaration of Conformity for Machinery .....	7
1.3 Technical data .....	8
Operator's manual .....	10
2.1 Assembling the stand .....	10
2.2 Assembly/Disassembly .....	10
2.3 Moving the spreader with lifting eye .....	12
2.4 Start-up .....	13
2.5 Adjusting the spread quantity .....	13
2.6 Adjusting the spread width .....	14
2.7 Adjusting the stirrer speed .....	15
2.8 Start/stop (extra equipment) .....	15
2.9 Application .....	15
Service and maintenance .....	17
3.1 Cleaning .....	17
3.2 Maintenance .....	18
3.3 Daily maintenance .....	18
Conditions .....	20
4.1 Warranty .....	20
4.2 Complaints .....	21
4.3 Disposal .....	21
Notes .....	22

The Egholm salt and sand spreader is a sturdy machine that keeps slippery paths out of your way!

The salt and sand spreader is made of robust components. The spreader plate is extremely hard wearing and can handle salt, sand and gravel of 8 mm.

The salt and sand spreader ensures precise and uniform spreading – and even thawing of the ground, for example cycle paths, pavements or parking areas. It is manually set, depending on weather conditions and driving speed, spreading only the sand and salt that is needed. The spread width can be adjusted from 1–5 m.

An optional cover to stop material from getting wet is available.

The salt and sand spreader is supplied with a specially-developed stand that makes it very easy for one person to fit or remove the attachment.

### Useful tips

Make sure the snap couplings are clean before attaching, as this protects the hydraulic system.

Daily cleaning and maintenance will extend the lifetime of both the machine and the attachment.

# General information

**Honest  
Machines**

# General information

## 1.1 Safety

Make sure no one is standing close to the machine:

Make sure that no one is near the machine while it is in use as there is a danger of crushing.



### N.B

As it is articulated, the rear end of the machine swings out when turning. Make sure that no one is standing near the machine while it is in use. (Picture 1)



### Make sure the salt and sand spreader is secure

Check the salt and sand spreader is firmly secured to the machine. (Picture 2)



### Avoid accidents at the rear of the salt and sand spreader

Keep fingers and feet well away from the rotating spreader plate. (Picture 3)



### Keep clear of the salt and sand spreader


Make sure there is no one close to the salt and sand spreader when it is in use.



### Avoid roll-overs

Do not drive the machine in a place where it can slide, tip or roll. Do not drive on slopes with an incline of more than 10°. (Picture 4)

Careless driving at high speed with a fully loaded salt and sand spreader increases the risk of roll-overs. Slow down well before reaching a curve or speed bump to minimise the risk of roll-overs.

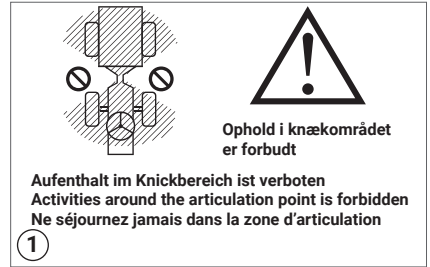

Prevent people from standing in the working area



Locking handle



Spreader plate



Do not drive on slopes with an incline of more than 10°

# General information

## 1.1 Safety - continued



### Risk of injury from lifting bar

Careful attention must be given when lowering the salt and sand spreader. Keep a secure hold of the lifting bar until the salt and sand spreader is resting on the machine. (Picture 1)



Salt and sand spreader being lowered onto the machine



### Safety grill

The safety grill must be fitted before the salt and sand spreader can be used. (Picture 2)



Safety grill




### Loading salt and grit

Do not fill the container all the way to the rim.



### Avoid damage to your hearing

Always wear approved ear protectors when using the machine. (Picture 3)

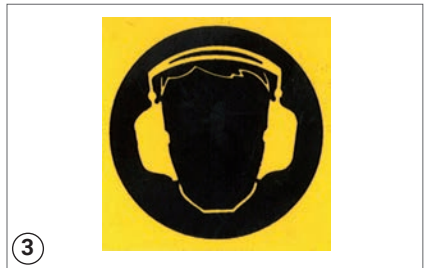

Ear protectors




### Avoid burns!

The hydraulic components heat up when using the salt and sand spreader. Do not touch the components until they have cooled down, or wear gloves.



### Avoid eye injuries!

Wear eye protection when checking the spreading width of the spreader plate. (Picture 4)

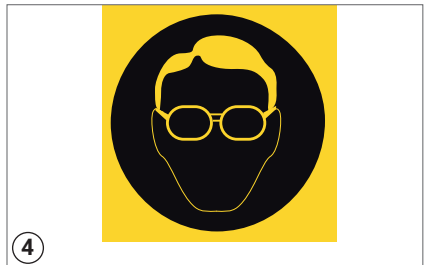

Eye protection

# General information

## 1.2 EC Declaration of Conformity for Machinery

Manufacturer: **Egholm A/S**  
Address: **Transportvej 27 · DK-7620 Lemvig**  
Telephone: **(+45) 97 81 12 05**


hereby declares that

The machine: **Salt and sand spreader 2260/2250**  
Type: **SG3**

· has been manufactured in conformity with the provisions of the Machinery Directive, 2006/42/EU

Any alteration, rebuilding or addition of implements, accessories or other equipment not manufactured by Egholm automatically results in the cancellation of type approval, CE approval, any other approval, as well as any warranty on machine and attachments.

Unless otherwise agreed in writing between the operator, customer and Egholm, Egholm is the data originator (data originator) of all data generated by the machine and attachments during use.

Place: Lemvig  
Date: \_\_\_\_\_  
Signature:   
Rainer Flanz, R&D Manager

# General information

## 1.3 Technical data

<b>Dimensions</b>	<b>Assembled</b>	<b>Storage dimensions</b>
Length (L) .....	2,690 mm .....	1,250 mm
Width (W) .....	1,070 mm .....	880 mm
Height with cab (H) .....	1,960 mm	
Weight .....		.91 kg
Stand weight .....		.31 kg
Tank volume .....		.240 L
Spread width .....		1 - 5 m
Loading height .....		1,290 mm
<b>Technical data</b>		
Type .....		22 SG3

### **N.B**

Specifications may be changed without prior notice.

**Spreading material must have a radius of 8 mm. Material that is larger can become stuck and may damage the salt and sand spreader.**

**More wear and tear must be expected when spreading gravel rather than salt and sand.**

### **Extra equipment**

E09723170 Cover

E50001551 Start/stop



# Operator's manual

**Honest  
Machines**

# Operator's manual

## 2.1 Assembling the stand

On delivery, the salt and sand spreader is fitted to either the City Ranger 2260/2250 or the supplied stand for attaching/detaching. If the attachment is fitted to the machine, the supplied stand must be assembled.

Assemble the stand using the two supplied bolts. It is now ready for use. (Picture 1)



2 bolts on the stand

## 2.2 Assembly/Disassembly

### Fitting the salt and sand spreader

The salt and sand spreader must be empty before being fitted or removed.

The stand must always be positioned on solid and level ground before the salt and sand spreader is fitted/disconnected. Moving the salt and sand spreader while fitted to the stand must only take place on solid and level ground.

1. Back the machine up to the salt and sand spreader mounted on the stand.
2. Stop the machine.
3. Check that the locking handle is in the unlocked position. The hooks must be positioned as shown in the picture. (Picture 2)
4. Check that the hydraulic couplings are clean and dirt-free. If not, clean with a dry cloth. (Picture 3)
5. Push the salt and sand spreader in over the carrier console. (Picture 4)  
The salt and sand spreader must be lined up with the centre of the machine.



Locking lever – unlocked



Cleaning the couplings



Mounting the salt and sand spreader

## 2.2 Assembly/Disassembly - continued

6. Press the lifting bar down, push the locking handle to free it from the catch and lower the salt and sand spreader down onto the machine. (Picture 1)



### Warning!

Avoid crushing fingers and keep a secure hold on the lifting bar when the salt and sand spreader is being lowered.

7. Check the salt and sand spreader is firmly secured to the machine.

8. Release the stand from the salt and sand spreader.


9. Push the locking handle grip in and turn anti-clockwise and then pull the locking handle out and swing it up. (Picture 2)

10. Attach the salt and sand spreader securely to the machine by turning the locking handle clockwise 1/3 of the way around. (Picture 3)

11. Push the locking handle in and turn it clockwise.

### Removing the salt and sand spreader


Follow the procedure for fitting in reverse order.

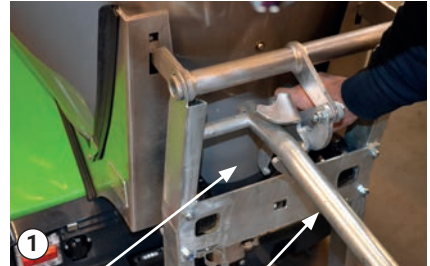

Locking handle grip      Lifting bar



Pull out locking handle

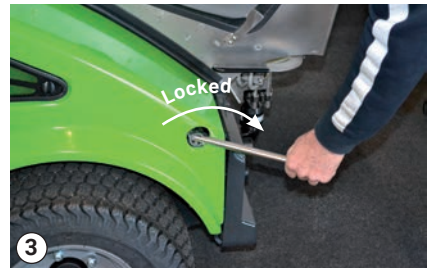

Turn locking handle

# Operator's manual

## 2.3 Moving the spreader with lifting eye

Use the lifting eye for moving the salt and sand spreader if the supplied stand cannot be used.




**NB!**

Do not lift the salt and sand spreader unless emptied of spreading material!

The lifting eye is located on top of the attachment, making it easy for a small crane to grab it. Otherwise use straps for lifting. (Picture 1+2)

Guide the salt and sand spreader by hand during the entire lifting operation.

The position of the lifting eye ensures that the salt and sand spreader is stable during the lifting operation.

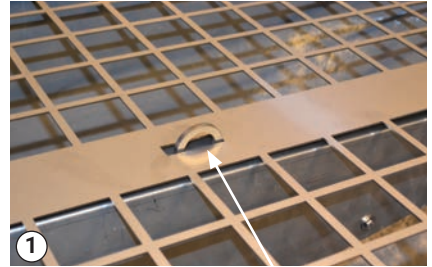

Lifting eye



Lifting with straps

## 2.4 Start-up

1. Start the machine.
2. Start the salt and sand spreader by activating PTO-rear. (Picture 1)



### Warning!

Make sure no one is standing close to the machine when it is in use.



### N.B!

When turning, the rear of the machine swings out, so there is a risk of crushing or collision.




### Avoid accidents at the rear of the salt and sand spreader

Keep fingers and feet well away from the rotating spreader plate. (Picture 2)



PTO-rear

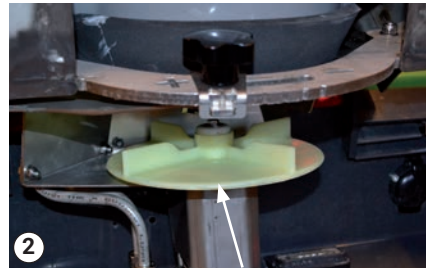


Spreader plate

## 2.5 Adjusting the spread quantity

The spread quantity can be adjusted at the rear of the salt and sand spreader.

Turn handle. (Picture 3)

- a. Turn the feed plate clockwise to reduce the supply.
- b. Turn the feed plate anti-clockwise to increase the supply.

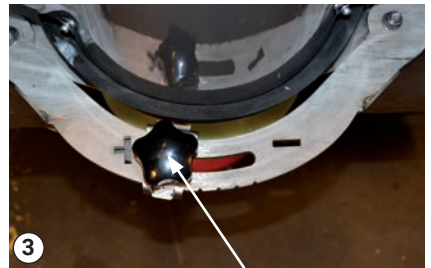

Turn handle

# Operator's manual

## 2.6 Adjusting the spread width

The spread width is the width at which the salt and sand spreader covers the ground. It can be adjusted from 1 m to 5 m depending on the spreading material.

Wear eye protection when adjusting the spreader plate.

The spreading width is adjusted at the front of the salt and sand spreader.

To set spreading width, turn the 'Distribution' handle at the front of the salt and sand spreader. (Picture 1+2)

The handle is adjustable from 1 to 6, 1 being the narrowest spreading width.




### Important!

Spreading material must have a radius of max 8 mm. Material that is larger can become stuck and may damage the salt and sand spreader.

More wear and tear must be expected when spreading gravel rather than salt and sand.



Adjusting the spread width - "Distribution"

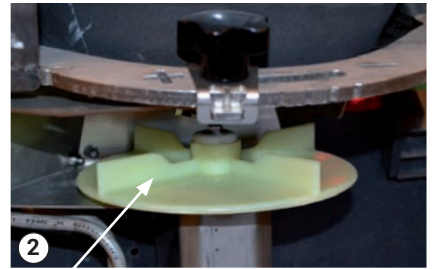

Spreader plate - the speed is adjusted by "Distribution"


## 2.7 Adjusting the stirrer speed

Stirrer speed is the speed at which the spreading material is stirred and led down to the spreader plate.

If coarse spreading material is used, reduce speed to prevent unnecessary wear.

To set stirring speed, turn the 'Mixer' handle at the front of the salt and sand spreader. (Picture 1)

The handle is adjustable from 1 to 6, 1 being the lowest stirring speed.

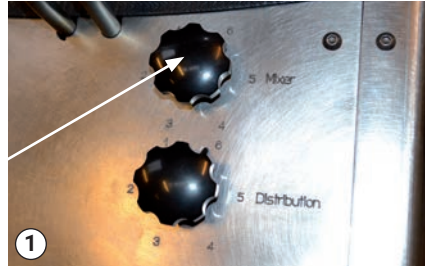

Adjusting the stirrer speed - "Mixer"

## 2.8 Start/stop (extra equipment)


The start/stop function ensures that the spreading stops while the machine is stationary, so that the salt and sand spreader only spreads when the machine is in motion.

The start/stop switch is located behind the left rear cover. (Picture 3)

Move the on/off switch to 'ON' to activate it before starting spreading. (Picture 4)




Remember to deactivate the on/off switch when changing the salt and sand spreader to another attachment.

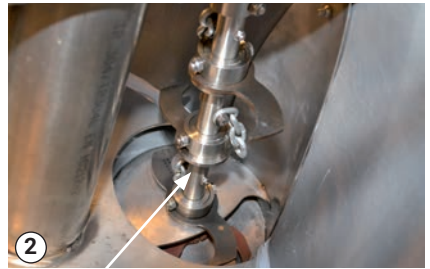

Stirrer - the speed is adjusted by "Mixer"



Start /stop function - behind the left rear cover

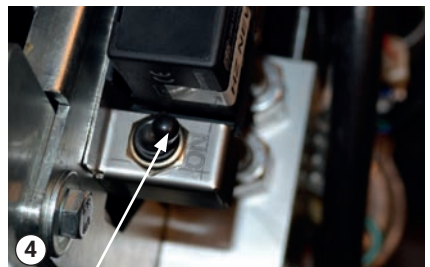

Start/stop ON

## 2.9 Application

The salt and sand spreader may only be used with the City Ranger 2260/2250.

The salt and sand spreader must not be used to manure or fertilise fields, or to spread lime.

It must not be used to store corrosive materials.

# **Service and maintenance**

**Honest  
Machines**



# Service and maintenance

## 3.1 Cleaning

### Cleaning the salt and sand spreader

Daily cleaning and maintenance will extend the lifetime of both the machine and the attachment.

It is recommended that the salt and sand spreader and machine are cleaned with water immediately after use to remove salt residues and waste in the container. Avoid high-pressure cleaning of the snap couplings.

Wipe snap couplings clean with a cloth.  
(Picture 1)

Remember to clean the machine thoroughly.

### Storage outside the season

When the salt and sand spreader is to be stored outside the season, the following steps are recommended:

Spray the salt and sand spreader with protective lubricant.

If the salt and sand spreader is to be stored for long periods or when the season is over, it is important to clean it to prevent rust from forming.

Clean the snap couplings before using the salt and sand spreader after storage.



Clean the couplings with a cloth

# Service and maintenance

## 3.2 Maintenance

Oil spills and other liquids must be collected as quickly as possible and disposed of.

It is recommended that the attachment is located on the stand during repair and maintenance. Make sure that the stand is firmly placed on a level surface – and that the wheels are locked before starting work.

If the attachment is fitted to the machine during repair and maintenance, take the following measures before starting work:

- a. Switch off engine
- b. Disconnect battery
- c. Disconnect hydraulics

When handling the hydraulic system of the machine, gloves and eye protection are recommended.

## 3.3 Daily maintenance

Check wearing parts and replace if necessary.

Lubricate the bottom bearing as required.

Hydraulic motors require no maintenance.

Check that all bolts and nuts are tightened.

Check the machine for correct tyre pressure and adjust if necessary.

See the operator's manual for the City Ranger 2260/2250 basic machine for daily maintenance of the machine.

# Conditions

**Honest  
Machines**

# Conditions

## 4.1 Warranty

The warranty period for the materials and manufacture of this salt and sand spreader is 12 months from the date of purchase.

In the case of errors or defects on the machine within the warranty period, Egholm will carry out the necessary repairs without charge for materials and working hours in accordance with the terms and conditions listed below.

### **The scope of warranty**

1. The Egholm warranty is only valid on presentation of the original receipt, supplied with model description, serial number and date of purchase.
2. Regular checks, adjustments, services and technical alterations are not covered by the warranty.
3. All inquiries concerning the warranty are to be addressed to the distributor, from whom the machine was purchased.
4. This warranty does not cover faults and defects which cannot be traced back to defects in material or production errors.
5. This warranty is valid for persons who have legally acquired the machine within the warranty period.
6. In the event of failure to perform and substantiate service in accordance with the applicable instructions, Egholm reserves the right to reject any claim made within the warranty period.
7. Egholm reserves the right to make improvements and design-related alterations to the machine without being obliged to modify previously delivered models in relation hereto.

### **The warranty does not cover**

- Wear and tear, accidents, damage to the equipment caused by operating errors, negligence, changes to the construction of the machine or use of non-Egholm spare parts or attachments.
- Machines with illegible serial numbers.
- Damage caused by force majeure such as lightning, flood, fire, war, civil disturbance, etc. or other causes over which Egholm has no control.

## 4.2 Complaints

All inquiries regarding the machine should be made at the distributor from whom the machine was purchased. This applies to inquiries concerning normal use, service, maintenance and spare parts, as well as to any complaints.

We wish you many years of safe and satisfied use of your machine.

Best regards  
Egholm A/S

## 4.3 Disposal

When, in many years from now, your salt and sand spreader has reached the end of its working life, it should be disposed of in a responsible manner that conforms with relevant disposal regulations.

1. Used hydraulic oil is to be disposed of at an approved waste disposal facility or site.
2. Remove all plastic and rubber parts and dispose of.
3. After the parts mentioned have been removed, the machine is ready to be handed over to one of your local approved scrap merchants.

# Notes



# Honest Work.

**Egholm A/S**  
Transportvej 27  
7620 Lemvig, Denmark  
T.: +45 97 81 12 05  
[www.egholm.eu](http://www.egholm.eu) - [info@egholm.dk](mailto:info@egholm.dk)